


24 port 1U UTP patch panel - category 6

P/N: PTH19P24UTP6

Date	Author	Review	Approve	Version	Revision Declaration
FEB 2015	R.T.	S.T.	L.K.	A1	-

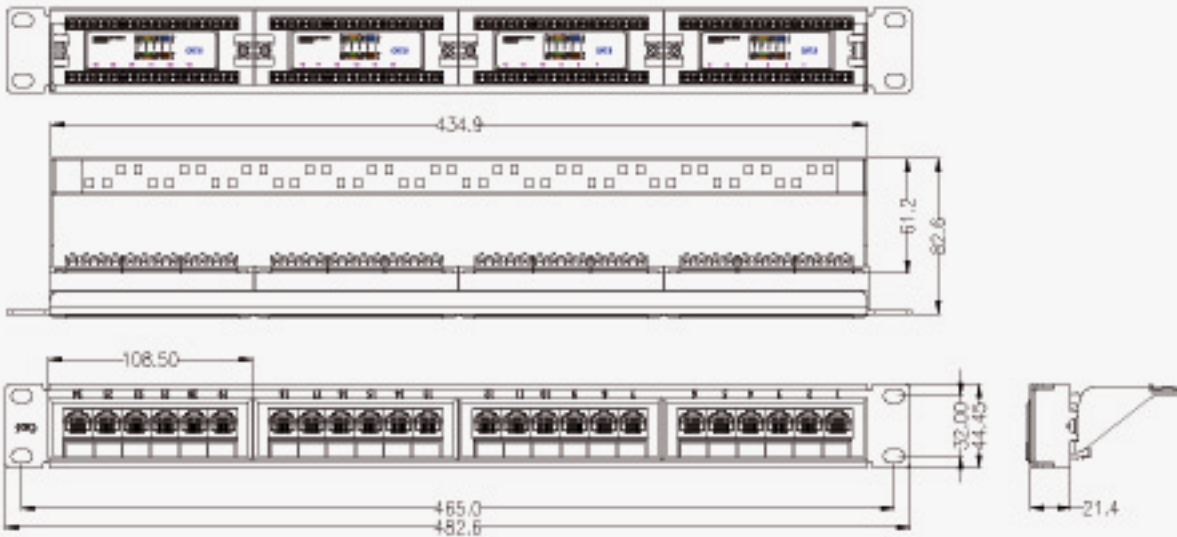

NOTES:

ELECTRICAL:

- 1.VOLTAGE RATING : 125 VAC RMS
- 2.CURRENT RATING : 1.5 AMP
- 3.CONTACT RESISTANCE :100 MILLIOHMS MAX
- 4.INSULATION RESISTANCE :1000 MEGOHMS MIN @ 500 VDC
- 5.DIELECTRIC STRENGTH :750 VAC RMS 60Hz,1MIN

ENVIRONMENTAL:

- 1.STORAGE :-40° TO +85°
- 2.OPERATION :0° TO 70°
- CONFORM TO ANSI/TIA/EIA-568 B.2-1
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68

MECHANICAL:

- 1. HOUSING MATERIAL :PBT+15%GF UL94V-0
- 2. PANEL FRAME :CARBON STEEL, POWDER COATING IN BLACK COLOR
- 3. CONTACT MATERIAL :PC UL94V-0 CONTACT:PHOSPHOR BRONZE WITH NICKEL PLATING
- 4. RJ45 JACK LIFE :750 TIMES MIN
- 5. IDC LIFE :200 TIMES MIN
- 6. WIRE :AWG 24-26